

# KELLY TANKS

## WTS WATER TREATMENT

### Universal treatment tanks with interchangeable coalescing media to suit all applications

Ideal solution when dewatering and dealing with stubborn suspended solids. The coalescing/lamella media provides a huge settling area and encourages settlement of all types of silt. Silt and Sludge is collected in the hopper and can be easily removed via the dump valve. Systems can be used with or without Flocculant. Media can be provided with varying diameter openings making the WTS the perfect system for any application. System can also be fitted with remote water quality monitoring systems and/or auto desludging pumps.

Lamella Coalescing media, can be used with Flocculant

Oil Skimmer & optional Hydrocarbon filter pads

Simple to set up, simple to empty, simple to operate

Solids emptied via dump valve for easy cleaning

### AVAILABLE FOR HIRE OR PURCHASE

Dims (mm)/ Weight approx.	<b>WTS</b> 2880 (L) 1560 (W) 1510 (H) / 820kg <b>WTS XL</b> 4020 (L) 1830 (W) 2140 (H) / 1320kg <b>WTS XXL</b> 4940 (L) 2370 (W) 2260 (H) / 2200kg <b>WTS XXL LH</b> 4210 (L) 2210 (W) 3250 (H) / 3200kg
Optimum Max Flowrate	<b>WTS</b> 15m <sup>3</sup> /hr <b>WTS XL</b> 25m <sup>3</sup> /hr <b>WTS XXL</b> 30-40m <sup>3</sup> /hr <b>WTS XXL LH</b> 50-60m <sup>3</sup> /hr
Power Required	NOT REQUIRED* *110V required if dosing or remote monitoring
Consumables	Flocculant Block (optional) Hydrocarbon Filter Pads (optional)

For further information contact  
**KELLY TANKS** on 01889 508944 or  
 email [info@kellytanks.co.uk](mailto:info@kellytanks.co.uk)



01889 508944



[www.kellytanks.co.uk](http://www.kellytanks.co.uk)



[info@kellytanks.co.uk](mailto:info@kellytanks.co.uk)



**LAMELLA/COALESCING**

**DOSING & DESLUDGING**

**SETTLEMENT TANKS**

**PH CONTROL**

**FLOCCULANT DOSING**

**REMOTE MONITORING**

**STORAGE TANKS**

**BESPOKE FABRICATION**



**ALSO AVAILABLE FOR PURCHASE OR HIRE, PUMPS, PIPEWORK, FITTINGS & MORE...**



**FLOW METER WITH PROPORTIONAL INLINE DOSING**

- Proportionally dose flocculants
- Accurately monitor flow rate
- Quick & Easy Set Up
- Lifting Points & Fork Pockets
- Robust, Easy to Use Meter

Real time monitoring and data logging equipment to measure and log pH and TSS levels in water.

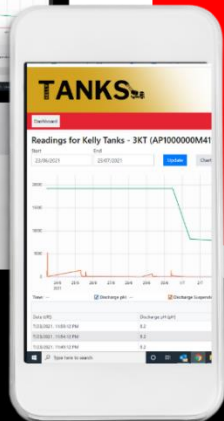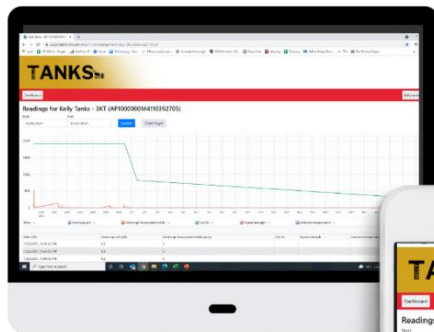

**REMOTE MONITORING SYSTEMS**

**For further information contact KELLY TANKS on 01889 508944 or email [info@kellytanks.co.uk](mailto:info@kellytanks.co.uk)**

